


## Product Code

# 6110N/X21

Receiver Valve

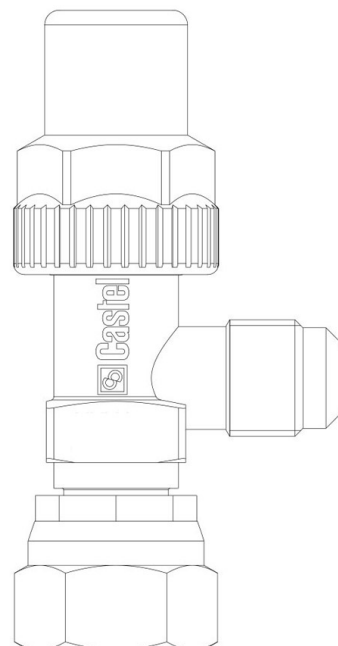

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

## Product Details

**Access fitting SAE Flare** 1/4" f (1)

**Connections SAE Flare** 1/4"

**Connections NPT** -

**Kv [m<sup>3</sup>/h]** 0,44

**PS [bar]** 50

**MWP [psi] (2)** 725

**TS [°C] min.** -40

**TS [°C] max.** +150

**Package pcs** 90

## Notes where expressly stated

(1): can be used without copper gasket

(2): according to UL approval