


## Product Code

# DB308/3

Solid Core Bi-Flow Filter Drier  
3/8" Flare  
PS = 50 bar - 680 PSI

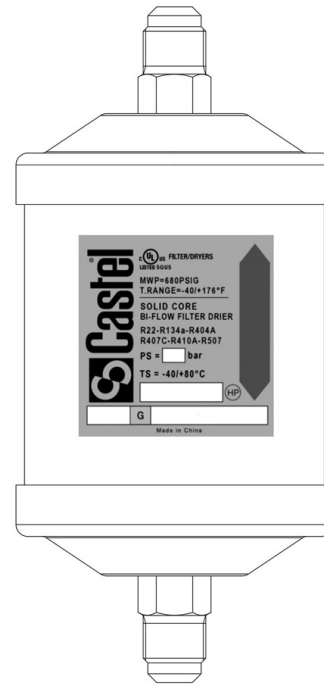

POLYHEDRA

CLASSIC

### Product use

Bi-flow hermetic filter dryers are designed to be installed on the liquid line of reverse cycle air conditioning systems and heat pumps.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFCF (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

### Product Details

International code 083

Connections SAE Flare 3/8"

Nominal volume [cm<sup>3</sup>] 130

PS [bar] 50

MWP [psi] (1) 680

TS [°C] min. -40

TS [°C] max. +80

Package pcs 25

## Notes where expressly stated

(1): according to UL approval