


## Product Code

# 8393/A

Cap  
5/16" Flare-Brass  
PS = 80 bar

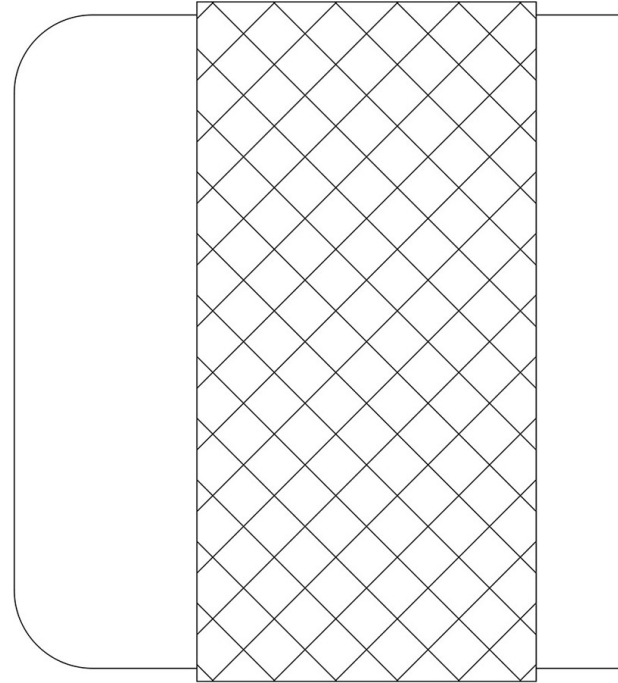

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HCFC (R22)
- HFC (R134a, R32, R404A, R407C, R410A, R507)
- HFO and HFO/HFC blends (R1234ze, R1234yf, R448A, R449A, R450A, R452A, R513A, R515A, R515B)
- HC (R290, R600, R600a, R1270)
- R744

## Product Details

**Connections SAE Flare M** -

**Connections SAE Flare F** 5/16"

**Static pressure [bar]** -

**Working pressure [bar]** -

**PS [bar]** 80

**TS [°C] min.** -20

**TS [°C] max.** +100

**Use** -

**Package pcs** 100

## Notes where expressly stated

(1) The key is required to remove the valve core