

## Product Code


# 3145W/M28

Check Valve

28mm ODS <br> PS = 50 bar - 650 PSI

POLYHEDRA

CLASSIC

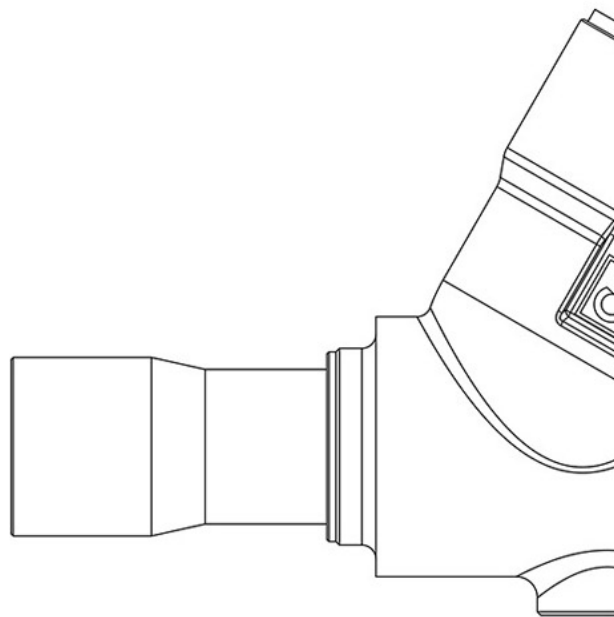

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

## Product Details

Connections SAE Flare	-
Connections ODS Ø [in.]	28
ODS Ø [mm]	0,3
Kv [m <sup>3</sup> /h]	10,4
Differential pressure (2) [bar]	0,3
PS [bar]	50
MWP [psi] (1)	650
TS [°C] Min	-40
TS [°C] Max	+150
Package pcs	8

## Notes where expressly stated

(1): according to UL approval

(2): minimum pressure at which the valve is completely open.