


Product Code

DB316/5S

Solid Core Bi-Flow Filter Drier
5/8"-16mm ODS
PS = 50 bar - 680 psi

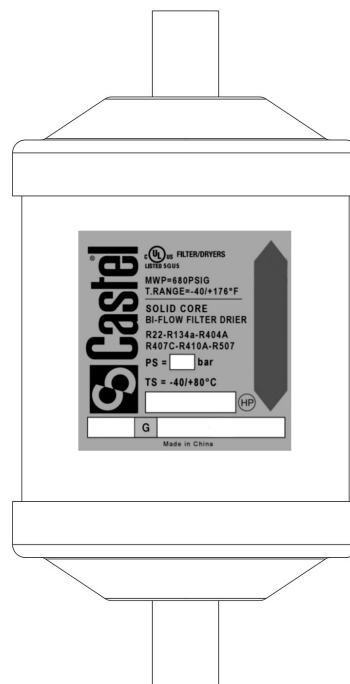

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:
HCFC (R22)
HFC (R134a, R404A, R407C, R410A, R507)
HFO (R1234ze)
HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)
HC (R290, R600, R600a, R1270)

Product Details

International code	165S
Connections ODS Ø [in.]	5/8"
Connections ODS Ø [mm]	16
Nominal volume [cm ³]	250
PS [bar]	50
MWP [psi] (1)	680
TS [°C] min.	-40
TS [°C] max.	+150
Package pcs	15

Notes where expressly stated

(1): according to UL approval