


Product Code

DF316/3S

Solid Core Filter Drier

3/8" ODS
PS = 50 bar - 680 PSI

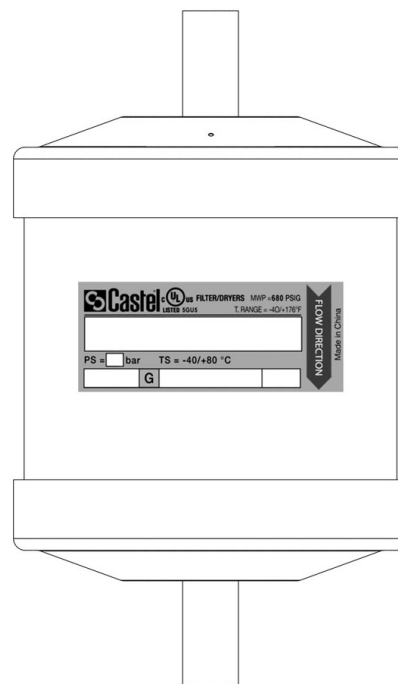

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

Product Details

International code	163S
Connections ODS Ø [in.]	3/8"
Connections ODS Ø [mm]	-
Nominal volume [cm³]	250
PS[bar]	50
MWP [psi] (1)	680
TS[°C] Min	-40
TS[°C] Max	+80
Package pcs	15

Notes where expressly stated

(1): according to UL approval

(2): not UL approved