


Product Code

5590/11

Two Connections for Oil Separator
1.3/8"-35mm ODS
PS = 45 bar

CLASSIC

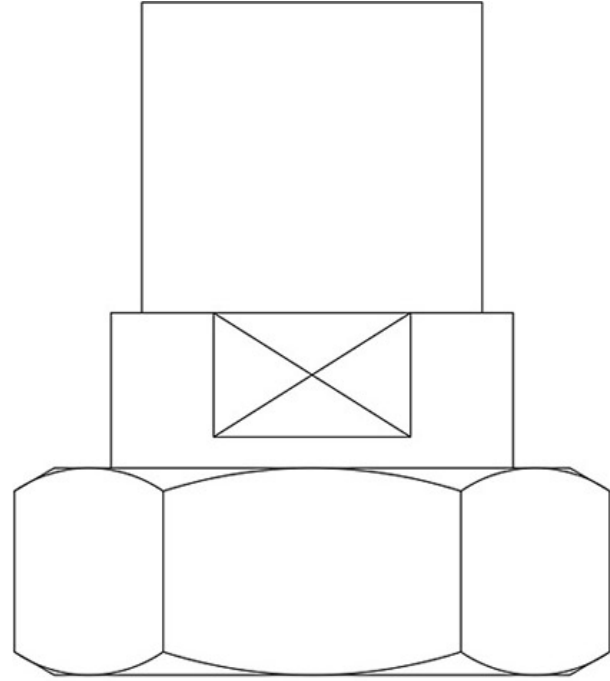

Product use

The oil separator intercepts the oil mixed with compressed gas and returns it to the oil reservoir or to the compressor crankcase, ensuring efficient lubrication of its moving parts. By eliminating or reducing the oil film on the condenser and evaporator heat exchange surfaces, the oil separator maintains a high heat exchange coefficient in this equipment.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Product Details

Solder connections ODS Ø [in.] 1.3/8"

Solder connections ODS Ø [mm] 35

Gasket (1) 003870

PS [bar] 45

TS [°C] min. -10

TS [°C] max. +130

Package pcs 24

Notes where expressly stated

(1) To be ordered separately