


## Product Code

# 9150N/R68

Orifice Assemblies  
05x2028N

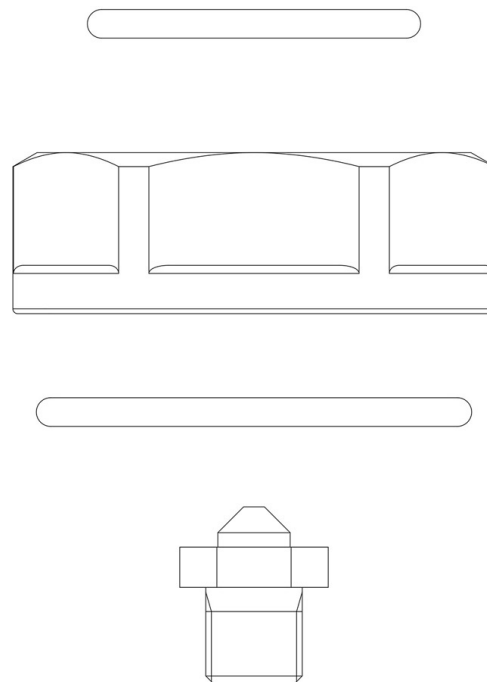

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

## Product Details

<b>Orifice type</b>	06
<b>Rated capacity (1) [kW] R134a</b>	7,14
<b>Rated capacity (1) [kW] R32</b>	15,84
<b>R404A</b>	6,66
<b>R507</b>	6,66
<b>R407C</b>	9,30
<b>R410A</b>	10,92
<b>R1234ze</b>	5,61
<b>R1234yf</b>	5,26
<b>R448A</b>	8,90
<b>R449A</b>	4,73
<b>R450A</b>	6,27

R452A	6,90
R452B	12,31
R454A	9,01
R454B	12,44
R454C	7,69
R513A	6,06
R515A	5,39
R515B	5,37
R290	9,62
R600	6,11
R600a	6,31
R1270	10,76
Package pcs.	180

## Notes where expressly stated

(1) Rated capacities are based on:

- Evaporating temperature  $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Condensing temperature  $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Refrigerant liquid temperature ahead of valve  $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$