


Product Code

3032E/66L

Changeover Valve CO2

3/4"NPTx3/4"NPT
PS = 150 bar - 2175 psi

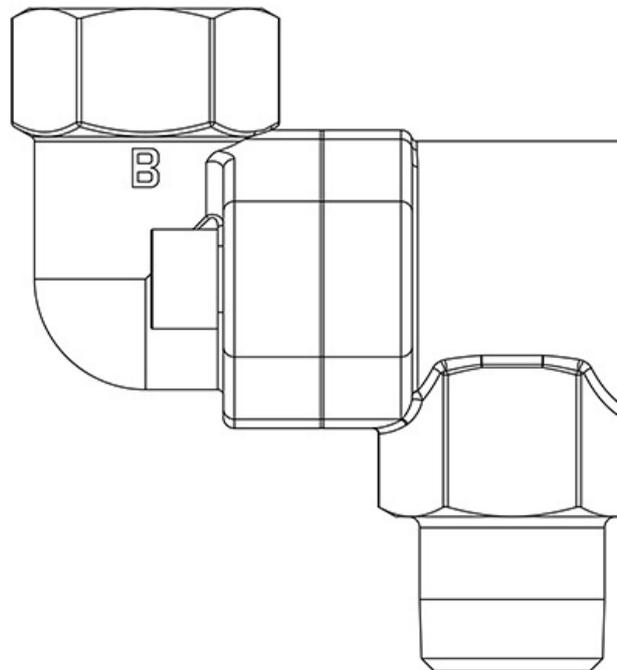

Product use

Switching valves in series 3032E act as a service valve for a pair of safety valves, allowing the use of one and the exclusion of the other. This device allows the user to work on the isolated valve, for periodic inspection or replacement, while the line is completely operative and the system safety is integral.

Accessories for use with refrigerant R744.

Product Details

Supplied connections -

Connections IN 3/4" NPT

Connections OUT 3/4" NPT

Kv [m³/h] 9,0

PS [bar] 150

MWP [psi] (3) 2175

TS [°C] min. -40

TS [°C] max. +150

Package pcs 6

Notes where expressly stated

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

- (1) use with 3030E/410C valve
- (2) use with 3030E/610C valve
- (3) according to UL approval