


Product Code

**3032N/66**

Changeover Valve

3/4" NPT - 3/4" NPT  
PS = 80 bar

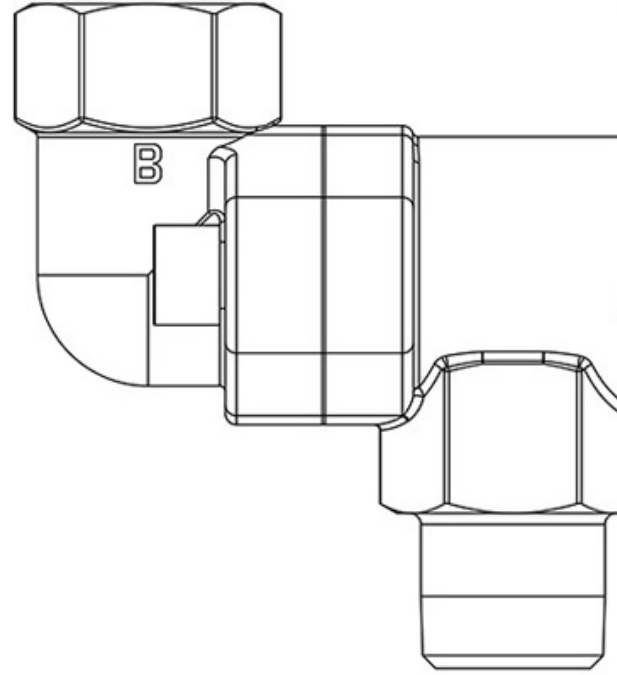

### Product use

Switching valves in series 3032N act as a service valve for a pair of safety valves, allowing the use of one and the exclusion of the other. This device allows the user to work on the isolated valve, for periodic inspection or replacement, while the line is completely operative and the system safety is integral.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

### Product Details

<b>Supplied connections</b>	-
<b>Connections IN</b>	3/4" NPT
<b>Connections OUT</b>	3/4" NPT
<b>Kv [m<sup>3</sup>/h]</b>	9
<b>PS [bar]</b>	80
<b>MWP [psi] (1)</b>	1015
<b>TS [°C] min.</b>	-40
<b>TS [°C] max.</b>	+150
<b>Package pcs</b>	6

### Notes where expressly stated

*Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.*

*Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.*

(1): according to UL approval