
Product Code

3150W/X01

Oil Reservoir Pressure Valve
3/8"Mx3/8"F Pset=0,35bar
PS = 50 bar

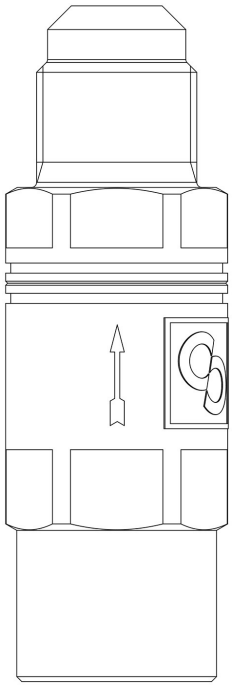

Product use

The calibrated valves are used where it is necessary to require a differential pressure between the oil reservoir and the compressor crankcase. This differential pressure allows the level oil regulator to be met.
Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:
HCFC (R22)
HFC (R134A, R32, R404A, R407C, R410A, R507)
HFO (R1234YF, R1234ZE)
HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
HC (R290, R600, R600A, R1270)

Product Details

connections SAE FLARE IN	3/8" - F
connections SAE FLARE OUT	3/8" - M
Kv [m³/h]	1,6
differential pressure [bar]	0,35
PS[bar]	50
TS[°C] min.	-40
TS[°C] max.	+150
Package pcs	20

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.
Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.