


## Product Code

# 9150N/R69

Orifice Assemblies  
07x2028N

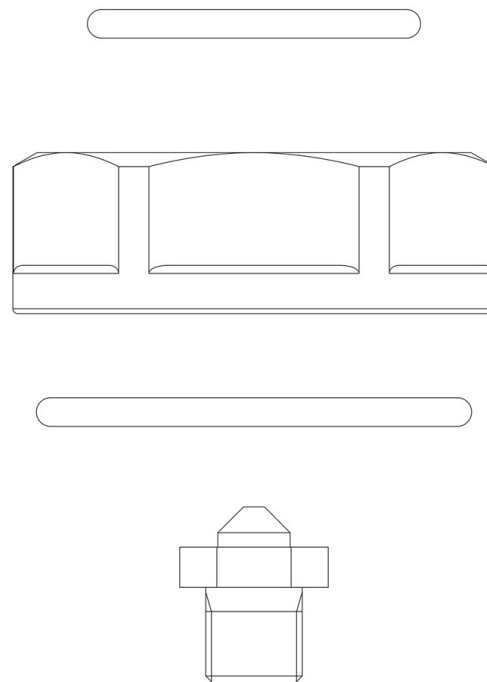

## Product use

Solenoid expansion valves with the EX suffix are compliant with the ESR of Directive 2014/34/EU ATEX. This equipment is suitable for use on refrigeration systems located in areas classified as Zone 2 risk of explosion, according to the definition in Annex I of Directive 1999/92/EC.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A,

R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

These valves are only sold in the model with the ATEX certified coil (A6 suffix), with 9 nozzles assembled for an increasing output from 2 to 36 kW with R290.

## Product Details

Orifice type	07
Rated capacity (1) [kW] R134a	11,26
Rated capacity (1) [kW] R32	24,98
R404A	10,51
R507	10,51
R407C	14,66
R410A	17,22
R1234ze	8,84
R1234yf	8,30
R448A	14,03

R449A	13,77
R450A	9,88
R452A	10,88
R452B	19,42
R454A	14,21
R454B	19,61
R454C	12,13
R513A	9,55
R515A	8,51
R515B	8,47
R290	15,17
R600	9,63
R600a	9,95
R1270	16,98
Package pcs.	180

## Notes where expressly stated

(1) Rated capacities are based on:

- Evaporating temperature  $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Condensing temperature  $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Refrigerant liquid temperature ahead of valve  $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$