


## Product Code

# 3150W/X03

Oil Reservoir Pressure Valve

3/8"Mx3/8"F Pset=3,00bar<br>PS = 80 bar

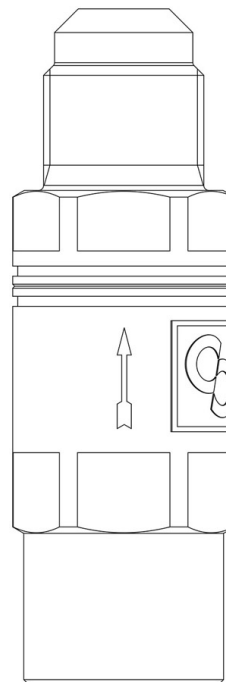

**POLYHEDRA**

### Product use

The calibrated valves are used where it is necessary to require a differential pressure between the oil reservoir and the compressor crankcase. This differential pressure allows the level oil regulator to be met.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

### Product Details

**connections SAE FLARE IN** 3/8" - F

**connections SAE FLARE OUT** 3/8" - M

**Kv [m<sup>3</sup>/h]** 1,6

**differential pressure [bar]** 3

**PS[bar]** 80

**TS[°C] min.** -40

**TS[°C] max.** +150

**Package pcs** 20