


Product Code

8392/B

Cap

1/4"Flare with remover-Brass
PS = 80 bar

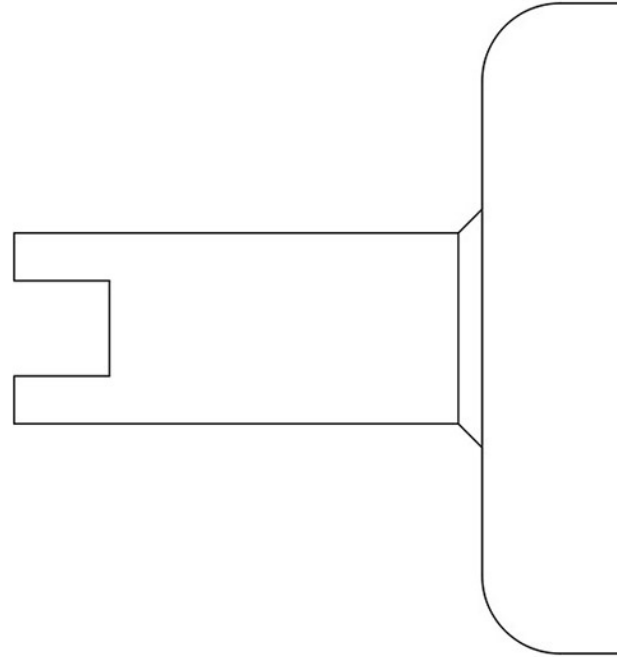

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HCFC (R22)
- HFC (R134a, R32, R404A, R407C, R410A, R507)
- HFO and HFO/HFC blends (R1234ze, R1234yf, R448A, R449A, R450A, R452A, R513A, R515A, R515B)
- HC (R290, R600, R600a, R1270)
- R744

Product Details

Connections SAE Flare M -

Connections SAE Flare F 1/4"

Static pressure [bar] -

Working pressure [bar] -

PS [bar] 80

TS [°C] min. -20

TS [°C] max. +100

Use -

Package pcs 100

Notes where expressly stated

(1) The key is required to remove the valve core