


## Product Code

# 3080/2C

Fusible Plug

1/4"NPT T=79° C<br>PS = 42 bar

CLASSIC

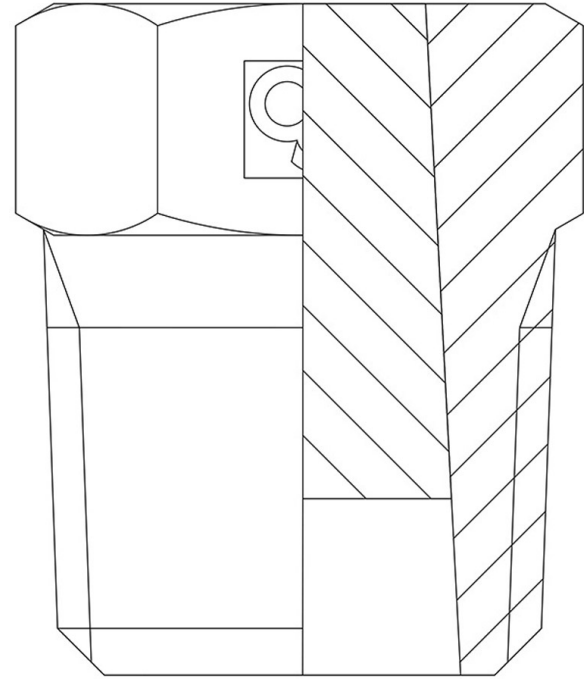

### Product use

Fusible plugs are safety devices that contain a material that melts at a specific temperature and consequently vents the pressure. Safety accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Alloy melting point 79 °C for plugs in series 3080. Alloy melting point 138 °C for plugs in series 3082.

### Product Details

|                                 |      |
|---------------------------------|------|
| Connections NPT                 | 1/4" |
| Flow section [mm <sup>2</sup> ] | 25,5 |
| Kd                              | 0,91 |
| PS[bar]                         | 42   |
| Melting point [°C]              | 79   |
| Max operating temperature [°C]  | 68   |
| Package pcs                     | 100  |