


Product Code

DB308/4S

Solid Core Bi-Flow Filter Drier
1/2" ODS
 PS = 50 bar - 680 PSI

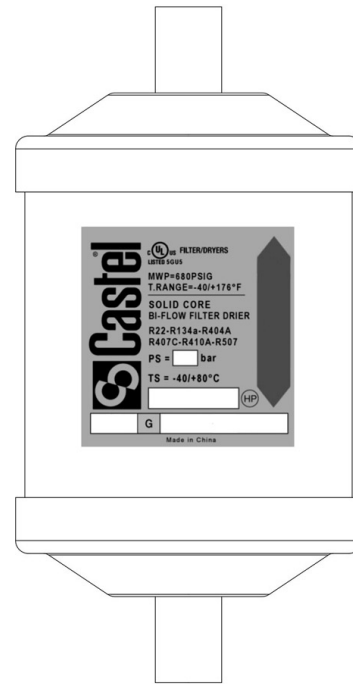

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:
 HCFC (R22)
 HFC (R134a, R404A, R407C, R410A, R507)
 HFO (R1234ze)
 HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)
 HC (R290, R600, R600a, R1270)

Product Details

International code	084S
Connections ODS Ø [in.]	1/2"
Connections ODS Ø [mm]	-
Nominal volume [cm ³]	130
PS [bar]	50
MWP [psi] (1)	680
TS [°C] min.	-40
TS [°C] max.	+80
Package pcs	25

Notes where expressly stated

(1): according to UL approval