


Product Code

DF216/5S

Anti-Acid Solid Core Filter Drier
5/8"-16mm ODS
PS = 50 bar - 680 PSI

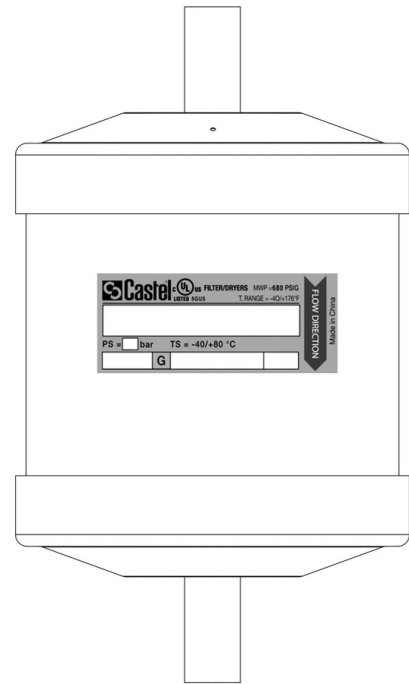

POLYHEDRA

CLASSIC

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

HC (R290, R600, R600a, R1270)

Product Details

International code 165S

Connections ODS Ø [in.] 5/8"

Connections ODS Ø [mm] 16

Nominal volume [cm³] 250

PS [bar] 50

MWP [psi] (1) 680

TS [°C] min. -40

TS [°C] max. +80

Package pcs 15

Notes where expressly stated

(1): according to UL approval