
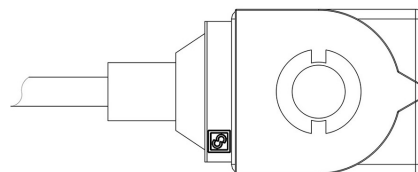


Product Code

9110EX/RA6

Coil Type CM2 ATEX
220-230V 50/60H Cable Length=1m

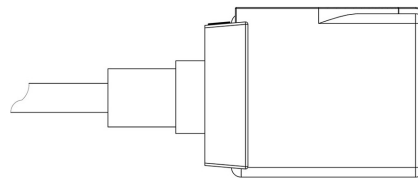

POLYHEDRA

Product use

Coils with the new ?FAST LOCK? fixing system, series 9300 and 9320, and coils with gear fixing systems, series 9110, 9120 and 9160.

Fast-on connections type DIN 43650/A for coils in series: 9120, 9160, 9300 and 9320; co-moulded cables for series 9110 coils. Protection rating IP65; IP68 for series 9160 coils coupled with series 9155 connectors.

Available voltages; 24 VAC - 50/60 Hz, 110 VAC - 50/60 Hz, 220/230 VAC - 50/60 Hz, 240 VAC - 50/60 Hz, 380 VAC - 50/60 Hz, 12 VDC, 24 VDC, 27 VDC, 48 VDC.

Connectors in series 9150, normalized DIN 43650, to wire, with IP65 protection rating. Connectors in series 9900, again normalized DIN 43650, pre-wired with various cable lengths, with IP65 protection rating.

Connectors in series 9155, to wire, with IP65/68 protection rating.

Product details

| | |
|---------------------------|---|
| Tipo Bobina | CM2 |
| Tensione [V] | 220/230 |
| Frequenza [Hz] | 50/60 |
| Potenza [W] | 8 |
| Note | Omologazione ATEX per uso in EX Zona 2 - dotata di ricambio G9151/R14 (ghiera |
| Lunghezza cavo [m] | 1 |
| Confezione n° pz | 8 |

Notes

(1) Bobina dotata di ricambio G9150/R97 (ghiera gialla + vite nera + OR)

(2) Utilizzare esclusivamente con connettore raddrizzatore 9150/R45