


## Product Code

# 9150N/R63

Orifice Assemblies  
01x2028

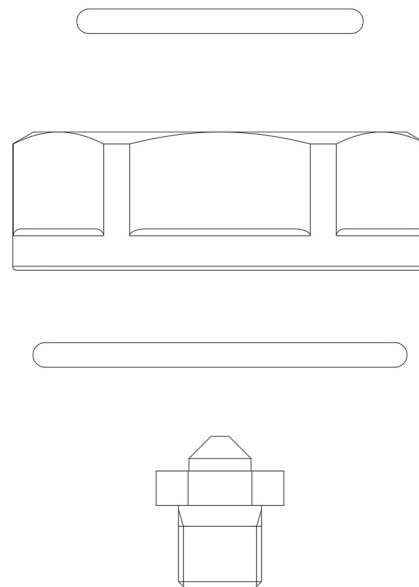

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

## Product details

**Tipo orificio** 01

**Potenzialità nominali (1) [kW]** R10,79

**Potenzialità nominali (1) [kW]** R€ 1,75

**R404A** 0,74

**R507** 0,74

**R407C** 1,03

**R410A** 1,21

**R1234ze** 0,62

**R1234yf** 0,58

**R448A** 0,98

**R449A** 0,97

**R450A** 0,69

R452A	0,76
R452B	1,36
R454A	1,00
R454B	1,38
R454C	0,85
R513A	0,67
R515A	0,60
R515B	0,59
R290	1,06
R600	0,68
R600a	0,70
R1270	1,19
Confezione n° pz	180

## Notes

(1) Le potenzialità nominali sono riferite a:

- Temperatura d'evaporazione  $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura di condensazione  $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura del liquido all'ingresso della valvola  $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$