
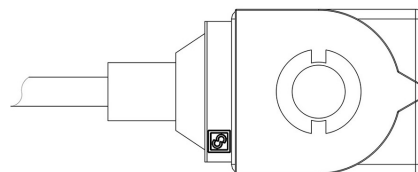


## Product Code

# 9110EX/RA7

Coil Type CM2 ATEX  
240V 50/60Hz Cable Length=1m

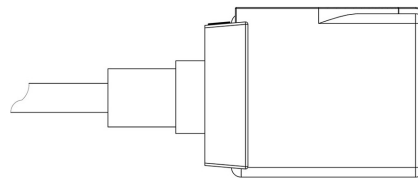

**POLYHEDRA**

### Product use

Coils with the new ?FAST LOCK? fixing system, series 9300 and 9320, and coils with gear fixing systems, series 9110, 9120 and 9160.

Fast-on connections type DIN 43650/A for coils in series: 9120, 9160, 9300 and 9320; co-moulded cables for series 9110 coils. Protection rating IP65; IP68 for series 9160 coils coupled with series 9155 connectors.

Available voltages; 24 VAC - 50/60 Hz, 110 VAC - 50/60 Hz, 220/230 VAC - 50/60 Hz, 240 VAC - 50/60 Hz, 380 VAC - 50/60 Hz, 12 VDC, 24 VDC, 27 VDC, 48 VDC.

Connectors in series 9150, normalized DIN 43650, to wire, with IP65 protection rating. Connectors in series 9900, again normalized DIN 43650, pre-wired with various cable lengths, with IP65 protection rating.

Connectors in series 9155, to wire, with IP65/68 protection rating.

### Product details

**Dibujo** img(9110\_RA2.jpg)

**Tipo Bobina** CM2

**N° catálogo** 9110EX/RA7

**Tensión [V]** 240

**Frecuencia [Hz]** 50/60

**Potencia [W]** 8

**CONECTORES Grado de protec** -

**CONECTORES Grado de protec** -

**note** Homologación ATEX para uso en EX Zona 2 con repuesto G9151/R14 (anillo am

**Longitud cable [m]** 1

## Notes

(1) bobina con repuesto G9150/R97 (anillo amarillo + tornillo negro + OR)