
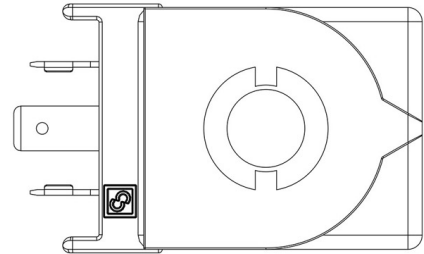


Product Code

9100EX/RA7

Coil Type HM2 ATEX
240V 50/60Hz

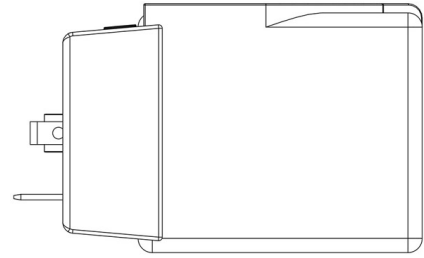

Product use

Coils with the new ?FAST LOCK? fixing system, series 9300 and 9320, and coils with gear fixing systems, series 9110, 9120 and 9160.

Fast-on connections type DIN 43650/A for coils in series: 9120, 9160, 9300 and 9320; co-moulded cables for series 9110 coils. Protection rating IP65; IP68 for series 9160 coils coupled with series 9155 connectors.

Available voltages; 24 VAC - 50/60 Hz, 110 VAC - 50/60 Hz, 220/230 VAC - 50/60 Hz, 240 VAC - 50/60 Hz, 380 VAC - 50/60 Hz, 12 VDC, 24 VDC, 27 VDC, 48 VDC.

Connectors in series 9150, normalized DIN 43650, to wire, with IP65 protection rating. Connectors in series 9900, again normalized DIN 43650, pre-wired with various cable lengths, with IP65 protection rating.

Connectors in series 9155, to wire, with IP65/68 protection rating.

Product details

| | |
|----------------------|---|
| Dibujo | img(9100_RA2.jpg) |
| Tipo Bobina | HM2 |
| N° catálogo | 9100EX/RA7 |
| N° catálogo | |
| Tensión [V] | 240 |
| Frecuencia [Hz] | 50/60 |
| Potencia [W] | 8 |
| note | Homologación ATEX para uso en EX Zona 2 con repuesto G9151/R14 (anillo am |
| Longitud cable [m] | - |
| Paquete de n° piezas | 90 |

Notes

- (1) bobina con repuesto G9150/R97 (anillo amarillo + tornillo negro + OR)
- (2) Utilizar exclusivamente con conector rectificador 9150/R45