
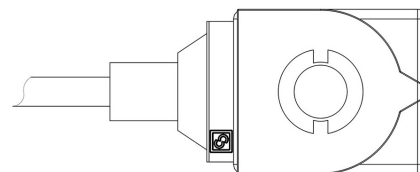


Product Code

9110EX/RA4

Coil Type CM2 ATEX
110V 50/60Hz Cable Length=1m

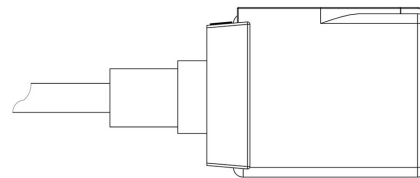

POLYHEDRA

Product use

Coils with the new ?FAST LOCK? fixing system, series 9300 and 9320, and coils with gear fixing systems, series 9110, 9120 and 9160.

Fast-on connections type DIN 43650/A for coils in series: 9120, 9160, 9300 and 9320; co-moulded cables for series 9110 coils. Protection rating IP65; IP68 for series 9160 coils coupled with series 9155 connectors.

Available voltages; 24 VAC - 50/60 Hz, 110 VAC - 50/60 Hz, 220/230 VAC - 50/60 Hz, 240 VAC - 50/60 Hz, 380 VAC - 50/60 Hz, 12 VDC, 24 VDC, 27 VDC, 48 VDC.

Connectors in series 9150, normalized DIN 43650, to wire, with IP65 protection rating. Connectors in series 9900, again normalized DIN 43650, pre-wired with various cable lengths, with IP65 protection rating.

Connectors in series 9155, to wire, with IP65/68 protection rating.

Product details

Dibujo	img(9110_RA2.jpg)
Tipo Bobina	CM2
N° catálogo	9110EX/RA4
N° catálogo	
Tensión [V]	110
Frecuencia [Hz]	50/60
Potencia [W]	8
note	Homologación ATEX para uso en EX Zona 2 con repuesto G9151/R14 (anillo am
Longitud cable [m]	1
Paquete de n° piezas	8

Notes

- (1) bobina con repuesto G9150/R97 (anillo amarillo + tornillo negro + OR)
- (2) Utilizar exclusivamente con conector rectificador 9150/R45