


Product Code

**4412/9AF**

Solid Core Drier Shell

1.1/8"ODS

PS = 50 bar - 470 PSI

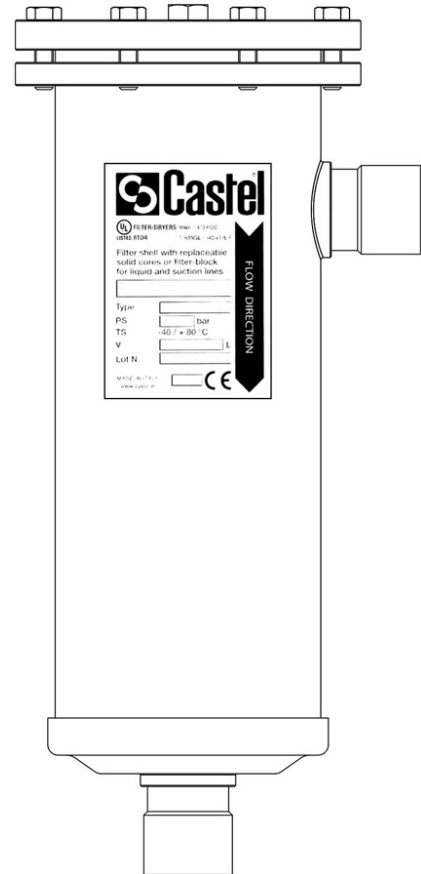

### Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

### Product details

Dibujo	img(4411_5AF.jpg)
N° catálogo Tapa roscada	4412/9AF
Conexiones ODS Ø [in.]	1.1/8"
Conexiones ODS Ø [mm]	-
W Ø [mm]	33,7
Tipo cartuchos	4490/A4490/B4490/AA4490/AB4490/BA4490/BB
N° cartuchos	2
Cubicación nominal [cm <sup>3</sup> ]	1600
PS[bar]	50

<b>MWP [psi] (1)</b>	470
<b>TS[°C] min.</b>	-40
<b>TS[°C] max.</b>	+80
<b>Paquete de n° piezas</b>	1

## Notes

(1): en conformidad con la homologación UL