

Product Code

**4413/9AF**

Solid Core Drier Shell  
1.1/8"ODS  
PS = 45 bar - 470 PSI

### Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.


Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

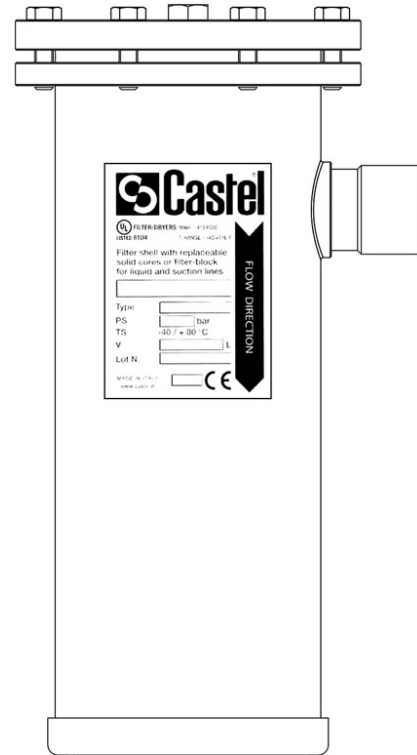

### Product details

Dibujo img(4411\_5AF.jpg)

N° catálogo Tapa roscada 4413/9AF

Conexiones ODS Ø [in.] 1.1/8"

Conexiones ODS Ø [mm] -

W Ø [mm] 33,7

Tipo cartuchos 4490/A4490/B4490/AA4490/AB4490/BA4490/BB

N° cartuchos 3

Cubicación nominal [cm<sup>3</sup>] 2400

PS[bar] 45

MWP [psi] (1) 470

TS[°C] min. -40

TS[°C] max. +80

Paquete de n° piezas 1

## Notes

(1): en conformidad con la homologación UL