

## Product Code

# 4424/34A

Solid Core Drier Shell  
4.1/4"-108mm ODS - 114,3W  
PS = 32 bar - 470 PSI

### Product use


Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges. Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

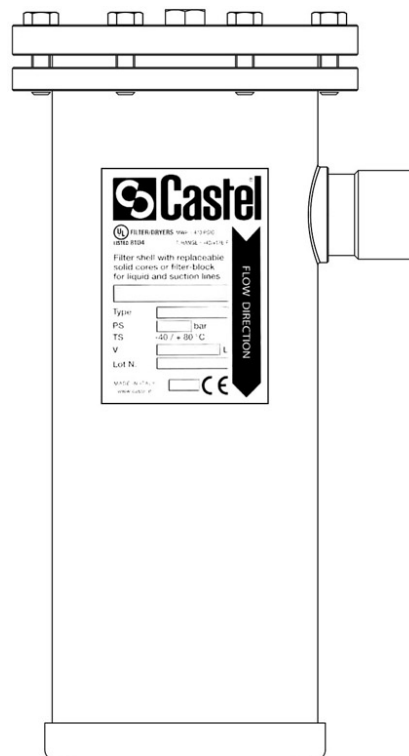

### Product details

Dibujo img(4411\_5AF.jpg)

N° catálogo Tapa roscada 4424/34A

Conexiones ODS Ø [in.] 4.1/4"

Conexiones ODS Ø [mm] 108

W Ø [mm] 114,3

Tipo cartuchos 4491/A4491/AA

N° cartuchos 4

Cubicación nominal [cm<sup>3</sup>] 6400

PS[bar] 32

MWP [psi] (1) 470

TS[°C] min. -40

TS[°C] max. +80

Paquete de n° piezas 1

## Notes

(1): en conformidad con la homologación UL