


Product Code

3350/4S

Receiver Pressure Regulator

1/2" ODS

PS = 28 bar - 405 PSI

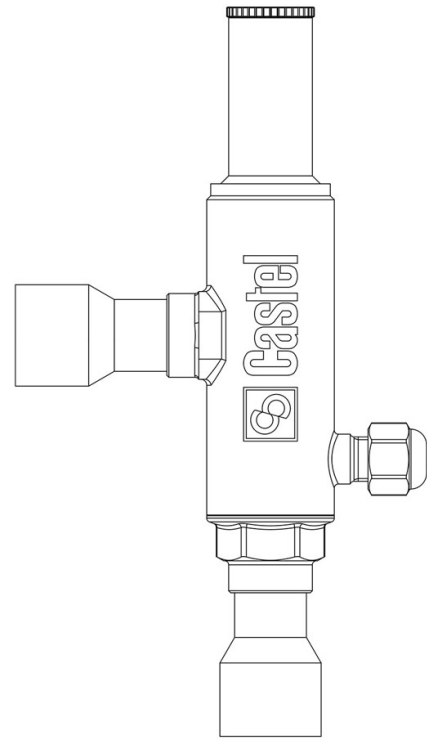

CLASSIC

Product use

These regulators are used with condensing pressure regulators, instead of differential valves. Together, these valves form a control system that maintains constant condenser and liquid receiver tank pressure in systems with heat recovery and air and water condensation. They by-pass the hot gas from the compressor outlet to the liquid receiver tank, increasing the pressure of the liquid in the receiver tank.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Product details

Dibujo img(3350_M12S.jpg)

N° catálogo 3350/4S

Conexiones SAE Flare -

Conexiones Ø ODS [in.] 1/2"

Ø ODS [mm] -

Campo de regulación [bar] 3 - 20

Kv [m³/h] 1,8

PS [bar] 28

MWP [psi] (1) 406

TS [°C] min.	- 40
TS [°C] max.	+ 110
Paquete de n° piezas	15

Notes

(1): en conformidad con la homologación UL