


Product Code

3150W/X02

Oil Reservoir Pressure Valve
3/8" M x 3/8" F Pset=1,40bar
PS = 80 bar

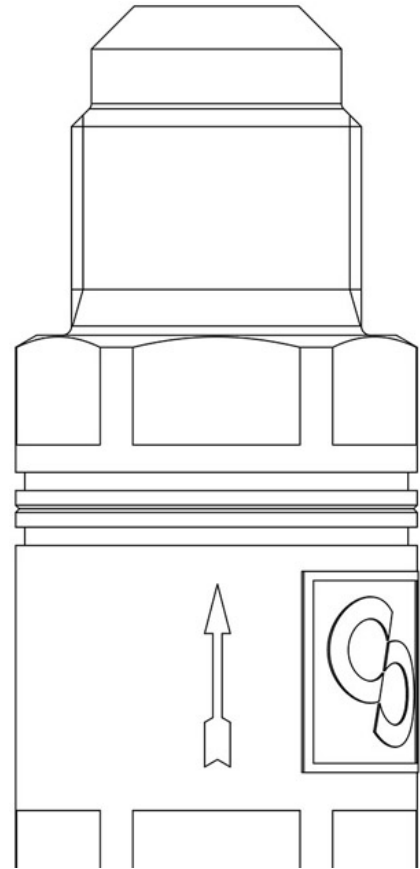

Product use

The calibrated valves are used where it is necessary to require a differential pressure between the oil reservoir and the compressor crankcase. This differential pressure allows the level oil regulator to be met. Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product details

Dibujo img(3150W_X01.jpg)

N° catálogo 3150W/X02

Conexiones SAE Flare IN 3/8" - F

Conexiones SAE Flare OUT 3/8" - M

Kv [m³/h] 1,6

Presión diferencial [bar] 1,4

PS[bar] 80

TS[°C] min. -40

TS[°C] max. +150

