


Product Code

9150N/R67

Orifice Assemblies
05x2028

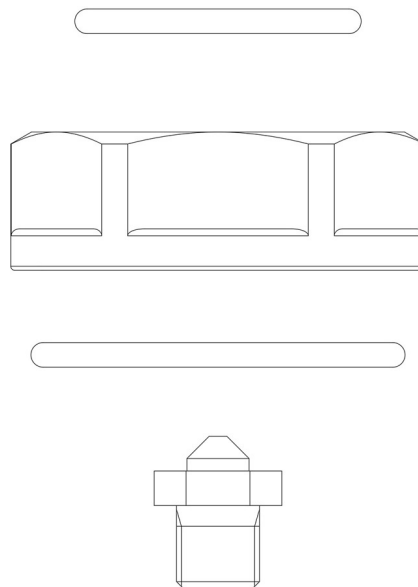

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Dibujo img(9150N_R63.jpg)

N° catálogo 9150N/R67

Tipo orificio 05

Potencialidades nominales (1) [l 5,15

Potencialidades nominales (1) [l 11,43

R404A 4,80

R507 4,80

R407C 6,71

R410A 7,88

R1234ze 4,05

R1234yf 3,80

R448A 6,42

R449A	6,30
R450A	4,52
R452A	4,98
R452B	8,88
R454A	6,50
R454B	8,97
R454C	5,55
R513A	4,37
R515A	3,89
R515B	3,88
R290	6,94
R600	4,40
R600a	4,55
R1270	7,76
Paquete de n° piezas	180

Notes

(1) Las potencialidades nominales se refieren a:

- Temperatura de evaporación $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura de condensación $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura del líquido en la entrada de la válvula $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$