


Product Code

9150N/R68

Orifice Assemblies

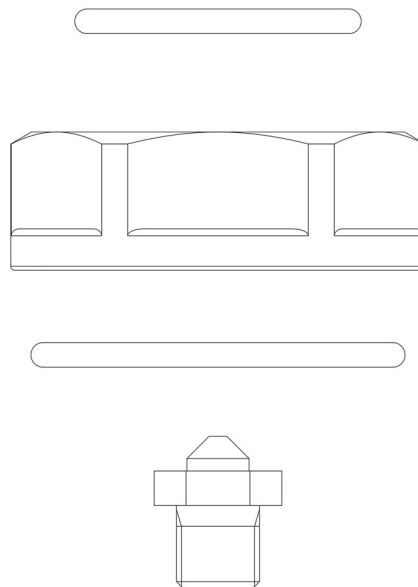

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

Product details

Dibujo img(9150N_R63.jpg)

N° catálogo 9150N/R68

Tipo orificio 06

Potencialidades nominales (1) [l 7,14

Potencialidades nominales (1) [l 15,84

R404A 6,66

R507 6,66

R407C 9,30

R410A 10,92

R1234ze 5,61

R1234yf 5,26

R448A 8,90

R449A	4,73
R450A	6,27
R452A	6,90
R452B	12,31
R454A	9,01
R454B	12,44
R454C	7,69
R513A	6,06
R515A	5,39
R515B	5,37
R290	9,62
R600	6,11
R600a	6,31
R1270	10,76
Paquete de n° piezas	180

Notes

(1) Las potencialidades nominales se refieren a:

- Temperatura de evaporación $T_{\text{evap}} = + 5 \text{ }^{\circ}\text{C}$
- Temperatura de condensación $T_{\text{cond}} = + 32 \text{ }^{\circ}\text{C}$
- Temperatura del líquido en la entrada de la válvula $T_{\text{liq}} = + 28 \text{ }^{\circ}\text{C}$