


Product Code

**3030/66C**

Safety Valve

3/4"NPTx3/4"G Pset=9,5bar

PS = 55 bar

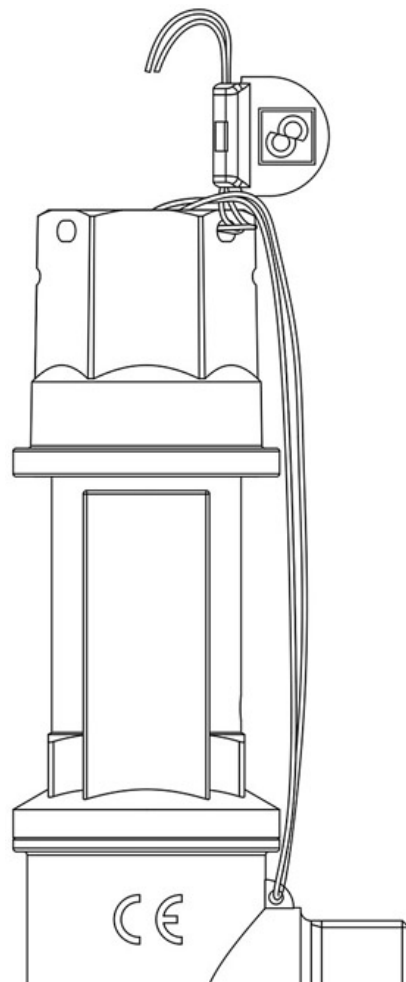

### Product use

Safety valve series 3030, 3060, 3061 3065, 3030E and 3061E, unbalanced conventional direct load. The valve opens when the thrust exerted on the plunger by the refrigerant under pressure, under calibrated conditions, overcomes the opposing force of the spring acting on the plunger.

Safety accessories for use with refrigerant R744, belonging to Group 2 as defined in Article 13 of Directive 2014/68/EU. Calibration range:

- from 9 to 50 bar for series 3030 and 3060
- from 11 to 60 bar for series 3061 and 3065
- from 60 to 150 bar for series 3030E and 3061E

### Product details

Dibujo img(3030\_88C.jpg)

N° catálogo 3030/66C

N° catálogo

Conexiones IN 3/4" NPT

Conexiones OUT 3/4" G

Sección orificio [mm<sup>2</sup>] 113

Coefficiente de pérdida Kd 0,9

Campo calibración [bar] 8 - 50

PS[bar]	55
TS[°C] min.	-50
TS[°C] max.	+150
Paquete de n° piezas	15

## Notes