


Product Code

3060/34C

Safety Valve

3/8"NPTx1/2"SAE Pset=9,0bar

PS = 55 bar

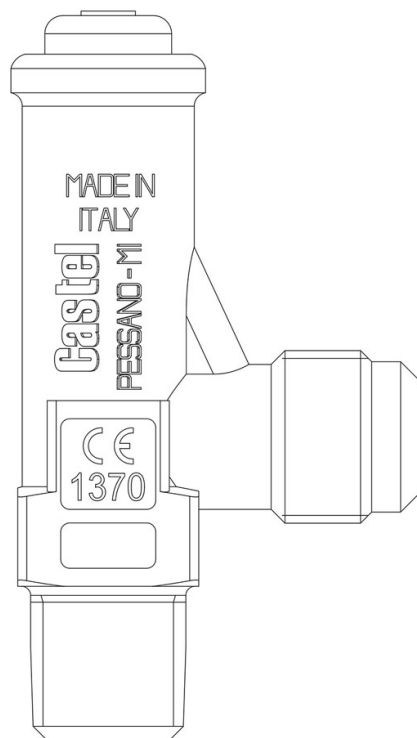

Product use

Safety valve series 3030, 3060, 3061 3065, 3030E and 3061E, unbalanced conventional direct load. The valve opens when the thrust exerted on the plunger by the refrigerant under pressure, under calibrated conditions, overcomes the opposing force of the spring acting on the plunger.

Safety accessories for use with refrigerant R744, belonging to Group 2 as defined in Article 13 of Directive 2014/68/EU. Calibration range:

- from 9 to 50 bar for series 3030 and 3060
- from 11 to 60 bar for series 3061 and 3065
- from 60 to 150 bar for series 3030E and 3061E

Product details

Dibujo img(3060_46C.jpg)

N° catálogo 3060/34C

N° catálogo

Conexiones IN 3/8" NPT

Conexiones OUT 1/2" SAE

Sección orificio [mm²] 38,5

Coefficiente de pérdida Kd 0,69

Campo calibración [bar] 9 - 50

PS[bar]	55
TS[°C] min.	-50
TS[°C] max.	+120
Paquete de n° piezas	45

Notes