

Product Code


3061/2TS

Safety valve

1/4"NPT x G3/8"Pset=

PS = 70 bar

POLYHEDRA

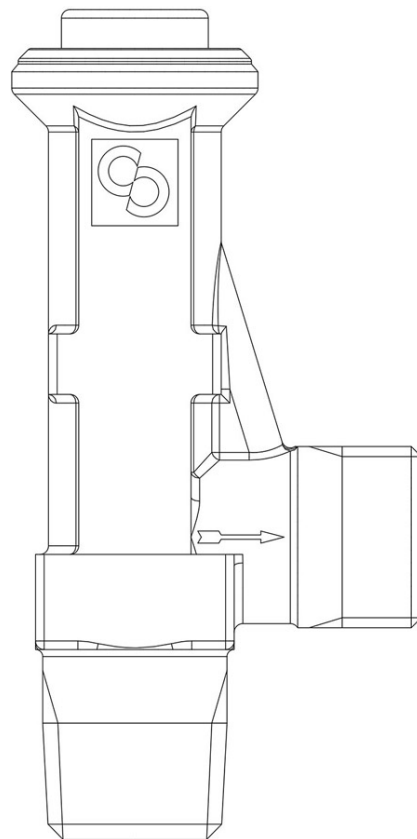

Product use

Safety valve series 3061 and 3065, unbalanced conventional direct load. The valve opens when the thrust exerted on the plunger by the refrigerant under pressure, under calibrated conditions, overcomes the opposing force of the spring acting on the plunger.

Safety accessories (with calibration range from 11 to 60 bar) for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product details

Dibujo 

N° catálogo 3061/2TS

Conexiones IN 1/4" NPT

Conexiones OUT 3/8" G

Sección orificio [mm²] 44,2

Coefficiente de pérdida Kd 0,783-G

Campo calibración [bar] 11 - 60

PS[bar] 70

TS[°C] min.	-50
TS[°C] max.	+120
Paquete de n° piezas	18

Notes

Número de licencia CASTEL para la producción de válvulas de seguridad: TSF700F77-2022