


## Product Code

# 1328N/2S030

Pulse Solenoid Valve  
1/4"ODS w/o Coil  
PS = 50 bar

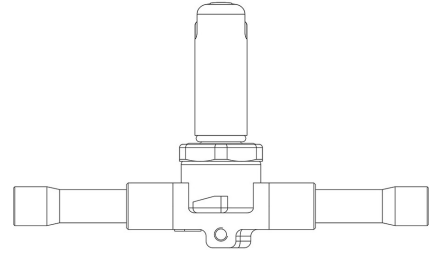

**P**  **LYHEDRA**

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:  
 HFC (R134A, R32, R404A, R407C, R410A, R507)  
 HFO (R1234YF, R1234ZE)  
 HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)  
 HC (R290, R600, R600A, R1270)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC).

### Product details

<b>Principio de funcionamiento</b>	Acción directa
<b>Dibujo</b>	img(1328N_2S.jpg)
<b>N° catálogo</b>	1328N/2S030
<b>Tipo Bobina (1)</b>	HF2HF3HF4HM2HM3HM4CM2
<b>Conexiones ODS Ø [in.]</b>	1/4"
<b>Conexiones ODS Ø [mm]</b>	-
<b>Kv [m³/h]</b>	0,23
<b>PS [bar]</b>	50
<b>TS [°C] (2) min.</b>	-40

TS [°C] (2) max.	+150
------------------	------

Paquete de n° piezas	24
----------------------	----

## Notes

(#) : para by-pass de gas caliente, inyección de líquido, línea de aceite

(1) : bobinas que pueden montarse en las válvulas

(2) : para usar en la línea de aceite TS = -10 /+ 70 ° C