
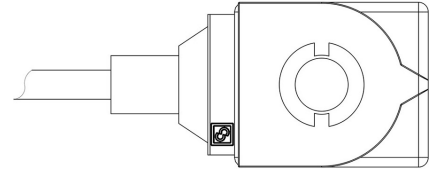


## Product Code

# 9110EX/RA4

Coil Type CM2 ATEX  
110V 50/60Hz Cable Length=1m

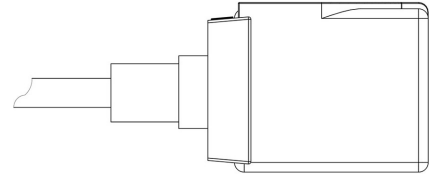

**P**  **LYHEDRA**

### Product use

Coils with the new ?FAST LOCK? fixing system, series 9300 and 9320, and coils with gear fixing systems, series 9110, 9120 and 9160.

Fast-on connections type DIN 43650/A for coils in series: 9120, 9160, 9300 and 9320; co-moulded cables for series 9110 coils. Protection rating IP65; IP68 for series 9160 coils coupled with series 9155 connectors.

Available voltages; 24 VAC - 50/60 Hz, 110 VAC - 50/60 Hz, 220/230 VAC - 50/60 Hz, 240 VAC - 50/60 Hz, 380 VAC - 50/60 Hz, 12 VDC, 24 VDC, 27 VDC, 48 VDC.

Connectors in series 9150, normalized DIN 43650, to wire, with IP65 protection rating. Connectors in series 9900, again normalized DIN 43650, pre-wired with various cable lengths, with IP65 protection rating.

Connectors in series 9155, to wire, with IP65/68 protection rating.

### Product details

<b>Coil Type</b>	CM2
<b>Voltage [V]</b>	110
<b>Frequency [Hz]</b>	50/60
<b>Power [W]</b>	8
<b>Note</b>	ATEX approval for use in EX Zone 2--- Spare part G9151/R14 (light blue nut + bl
<b>Cable length [m]</b>	1
<b>Package Pcs.</b>	8

### Notes

(1) Coil with spare part G9150/R97 (yellow nut + black screw + OR)

(2) Use only with 9150/R45 connector / rectifier