

Product Code

DI330N/6S

Filter Drier with Moisture Indicator

3/4" ODS

PS = 50 bar - 680 PSI



Product use

These are filter dryers for the liquid line with a moisture indicator, brazed directly onto the outlet of the filter.


Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

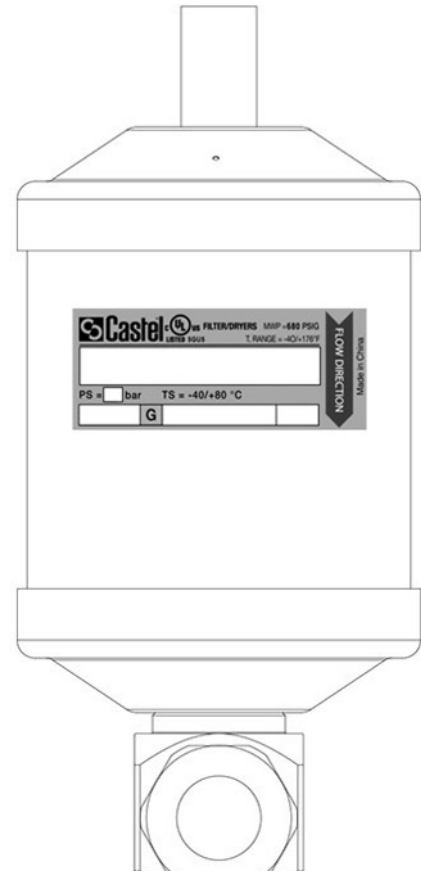

Product details

International code	306S
Connections ODS Ø [in.]	3/4"
Connections ODS Ø [mm]	-
Nominal volume [cm ³]	500
PS [bar]	50
MWP [psi] (1)	680
TS [°C] min.	-40
TS [°C] max.	+80
Package pcs	6

Notes

(1): according to UL approval