

## Product Code

# 4423/17A

Solid Core Drier Shell  
2.1/8"-54mm ODS - 60,3W  
PS = 32 bar - 470 PSI

### Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.


Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

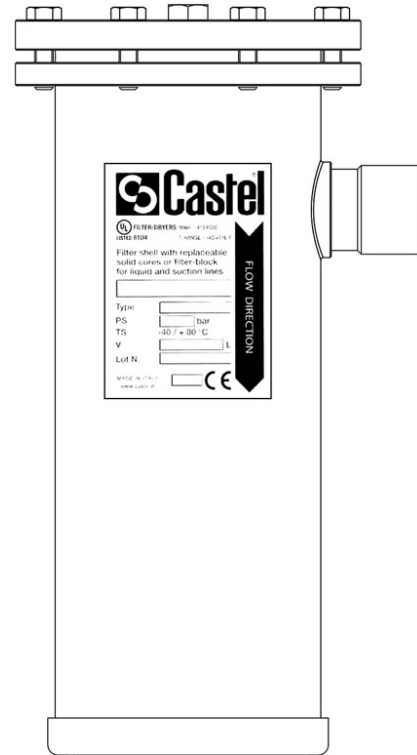

### Product details

Part number Threaded cover 4423/17A

Connections ODS Ø [in.] 2.1/8"

Connections ODS Ø [mm] 54

W Ø [mm] 60,3

Cores type 4491/A4491/AA

N° of cores 3

Nominal volume [cm<sup>3</sup>] 4800

PS [bar] 32

MWP [psi] (1) 470

TS [°C] min. -40

TS [°C] max. +80

Package pcs 1

## Notes

(1): according to UL approval