


Product Code

DF316EX/5S

Solid Core Filter Drier ATEX
5/8"-16mm ODS
PS = 47 bar

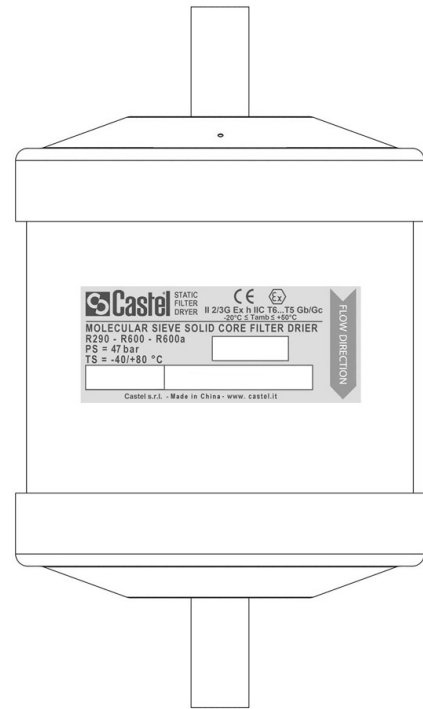

Product use

Hermetic filter dryers with the "EX" suffix are compliant with the ESR of Directive 2014/34/EU "ATEX". This equipment is suitable for use on refrigeration systems located in areas classified as "Zone 2" risk of explosion, according to the definition in Annex I of Directive 1999/92/EC.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product details

| | |
|-----------------------------------|------|
| International code | 5/8" |
| Connections ODS Ø [in.] | 16 |
| Connections ODS Ø [mm] | 3/4" |
| ODM Ø [in.] | - |
| ODM Ø [mm] | 250 |
| Nominal volume [cm ³] | 250 |
| PS [bar] | 47 |
| TS [°C] min. | -40 |
| TS [°C] max. | +80 |
| Package pcs | 15 |