


Product Code

4411/7AF

Solid Core Drier Shell
7/8"-22mm ODS
PS = 50 bar - 470 PSI

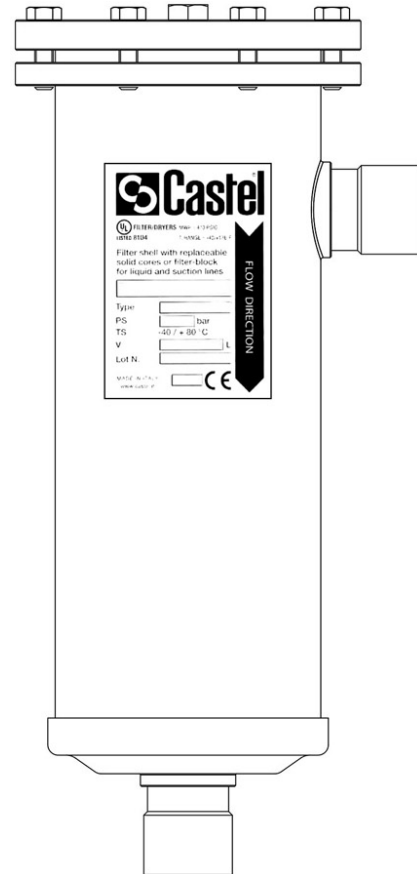

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product details

| | |
|-----------------------------------|--|
| Part number Threaded cover | 4411/7AF |
| Connections ODS Ø [in.] | 7/8" |
| Connections ODS Ø [mm] | 22 |
| W Ø [mm] | 26,9 |
| Cores type | 4490/A4490/B4490/AA4490/AB4490/BA4490/BB |
| N° of cores | 1 |
| Nominal volume [cm ³] | 800 |
| PS [bar] | 50 |

| | |
|----------------------|-----|
| MWP [psi] (1) | 470 |
| TS [°C] min. | -40 |
| TS [°C] max. | +80 |
| Package pcs | 1 |

Notes

(1) according to UL approval