
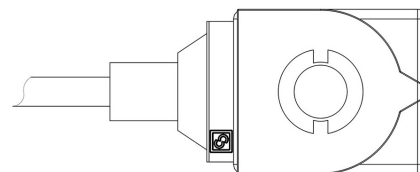


Product Code

9110EX/RA2

Coil Type CM2 ATEX
24V 50/60Hz Cable Length=1m

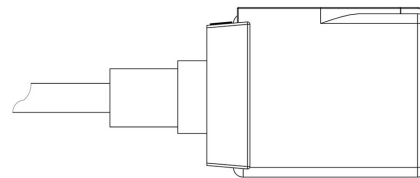

P  **LYHEDRA**

Product use

Coils with the new ?FAST LOCK? fixing system, series 9300 and 9320, and coils with gear fixing systems, series 9110, 9120 and 9160.

Fast-on connections type DIN 43650/A for coils in series: 9120, 9160, 9300 and 9320; co-moulded cables for series 9110 coils. Protection rating IP65; IP68 for series 9160 coils coupled with series 9155 connectors.

Available voltages; 24 VAC - 50/60 Hz, 110 VAC - 50/60 Hz, 220/230 VAC - 50/60 Hz, 240 VAC - 50/60 Hz, 380 VAC - 50/60 Hz, 12 VDC, 24 VDC, 27 VDC, 48 VDC.

Connectors in series 9150, normalized DIN 43650, to wire, with IP65 protection rating. Connectors in series 9900, again normalized DIN 43650, pre-wired with various cable lengths, with IP65 protection rating.

Connectors in series 9155, to wire, with IP65/68 protection rating.

Product details

| | |
|-------------------------|---|
| Coil Type | CM2 |
| Voltage [V] | 24 |
| Frequency [Hz] | 50/60 |
| Power [W] | 8 |
| Note | ATEX approval for use in EX Zone 2--- Spare part G9151/R14 (light blue nut + bl |
| Cable length [m] | 1 |
| Package Pcs. | 8 |

Notes

(1) Coil with spare part G9150/R97 (yellow nut + black screw + OR)

(2) Use only with 9150/R45 connector / rectifier