


Product Code

**5650/LA2**

Electronic Oil Level Regulator

24 VAC - 50/60 Hz

PS = 50 bar

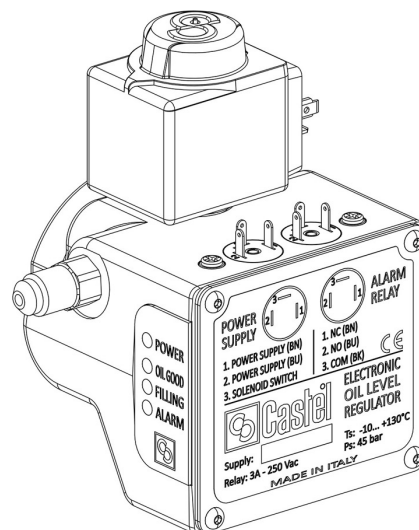

**POLYHEDRA**

## Product use

The oil level regulators ensure monitoring and control of the oil level in the crankcases of both alternative reciprocating and scroll compressors. Specifically, these regulators are employed to resolve the problem of incorrect oil distribution in multiple compressor plants.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

## Product details

**Connections Compressor crank** 5690/X115690/X125690/X135690/X145690/X155690/X17

**Connections Oil level inspector** 1 sight glass

**Oil inlet SAE FLARE** 3/8"

**Version** Left

**Voltage [V]** 24 AC

**Frequency [Hz]** 50/60

**Degree of protection** IP 65

**Cables kit (1)** 9901/X26

**PS [bar]** 50

|                     |      |
|---------------------|------|
| <b>TS [°C] min.</b> | -30  |
| <b>TS [°C] max.</b> | +130 |
| <b>Package pcs</b>  | 4    |

## Notes

(1) To be ordered separately