

Product Code

**DF216/5S**


Anti-Acid Solid Core Filter Drier

5/8"-16mm ODS

PS = 50 bar - 680 PSI

**P**  **LYHEDRA**

**C**  **LASSIC**

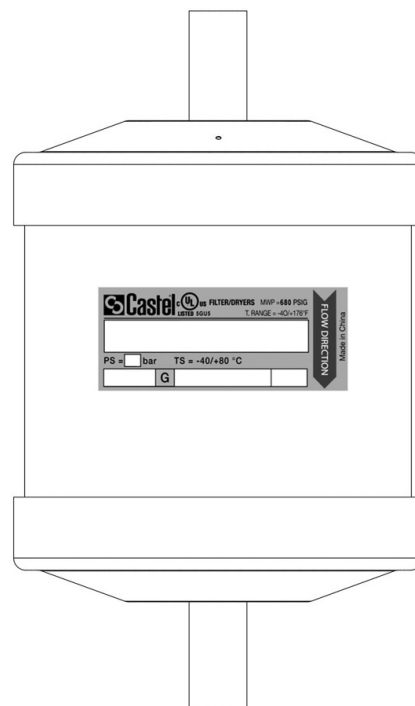

### Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

HC (R290, R600, R600a, R1270)

### Product details

International code 165S

Connections ODS Ø [in.] 5/8"

Connections ODS Ø [mm] 16

Nominal volume [cm<sup>3</sup>] 250

PS [bar] 50

MWP [psi] (1) 680

TS [°C] min. -40

TS [°C] max. +80

Package pcs 15

## Notes

(1): according to UL approval