


Product Code

SF412/13A

Solid Core Drier Shell
1.5/8" ODS
PS = 47 bar - 600 PSI

CLASSIC

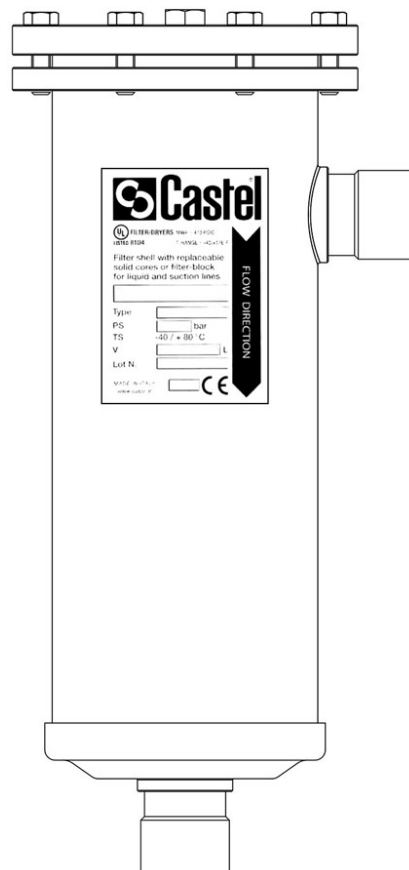

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Product details

| | |
|-----------------------------------|--|
| Connections ODS Ø [in.] | 1.5/8" |
| Connections ODS Ø [mm] | - |
| Cores type | 4490/A4490/B4490/AA4490/AB4490/BA4490/BB |
| N° of cores | 2 |
| Nominal volume [cm ³] | 1600 |
| PS [bar] | 47 |
| MWP [psi] (1) | 600 |
| TS [°C] min. | -40 |
| TS [°C] max. | +80 |
| Package pcs | 1 |

Notes

(1): according to UL approval