

Product Code

7690N/M15

Vibration Absorber
15mm ODS



Product use


Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134a, R32, R404A, R407C, R410A, R507)
- HFO and HFO/HFC blends (R1234ze, R1234yf, R448A, R449A, R450A, R452A, R452B, R454B, R513A)
- HC (R290, R600, R600a, R1270)

Maximum allowable pressure PS = 50 bar.

Allowable temperatures TS = -80 to +140 °C

AISI 304 stainless steel connections.

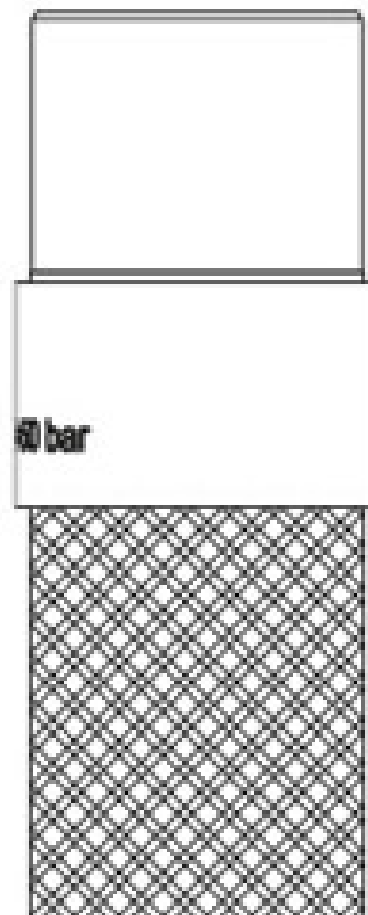

Product details

| | |
|----------------------------|----|
| Raccords ODS Ø [in.] | - |
| Raccords ODS Ø [mm] | 15 |
| PS [bar] TS [°C]-80 / +100 | 50 |
| PS [bar] TS [°C]+120 | 49 |
| TS [°C]+150 | 48 |
| Emballage | 50 |

