


Product Code

**1328N/2S030**

Pulse Solenoid Valve

1/4"ODS w/o Coil

PS = 50 bar

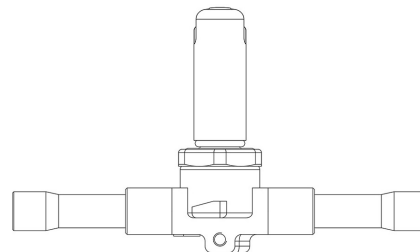

**P**  **LYHEDRA**

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

- HFC (R134A, R32, R404A, R407C, R410A, R507)
- HFO (R1234YF, R1234ZE)
- HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)
- HC (R290, R600, R600A, R1270)

These valves are sold in both the version without the coil (S suffix) and the version with the coil (A6 suffix for coils at 220 VAC).

## Product details

<b>Principe de fonctionnement</b>	Action directe
<b>Type bobine (1)</b>	HF2HF3HF4HM2HM3HM4CM2
<b>Raccords ODS Ø [in.]</b>	1/4"
<b>Raccords ODS Ø [mm]</b>	-
<b>Kv [m<sup>3</sup>/h]</b>	0,23
<b>PS [bar]</b>	50
<b>TS [°C] (2) min.</b>	-40
<b>TS [°C] (2) max.</b>	+150
<b>Emballage</b>	24

## Notes

(#): pour la dérivation de gaz chaud, injection de liquide, conduite d'huile

(1) : bobines qui peuvent être montés sur les vannes

(2): pour utilisation sur la conduite d'huile TS = -10 / + 70 ° C