


Product Code

4411/5CF

Solid Core Drier Shell

5/8"-16mm ODS

PS = 50 bar - 470 PSI

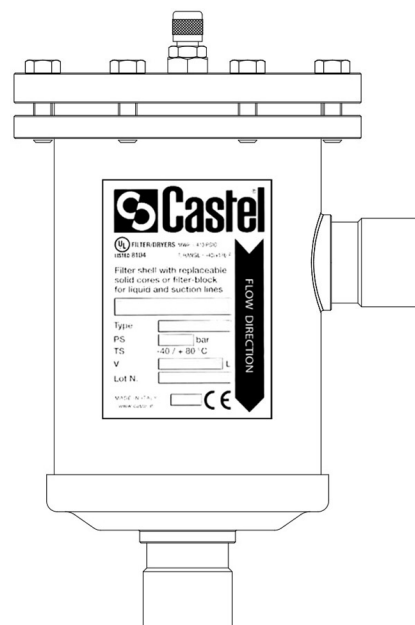

Product use

Filters for the compressor safety intake line that allow the replacement of the filter element, the so-called cartridge.

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HCFC (R22)

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product details

Raccords ODS Ø [in.] 5/8"

Raccords ODS Ø [mm] 16

W Ø [mm] 21,3

Type cartouches 4495/C

Surface filtrante [cm²] 820

PS [bar] 50

MWP [psi] (1) 470

TS [°C] min. -40

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

TS [°C] max. +80

Emballage 1

Notes

(1): conformément à homologation UL