


Product Code

4412/13AF

Solid Core Drier Shell
1.5/8" ODS
PS = 50 bar - 470 PSI

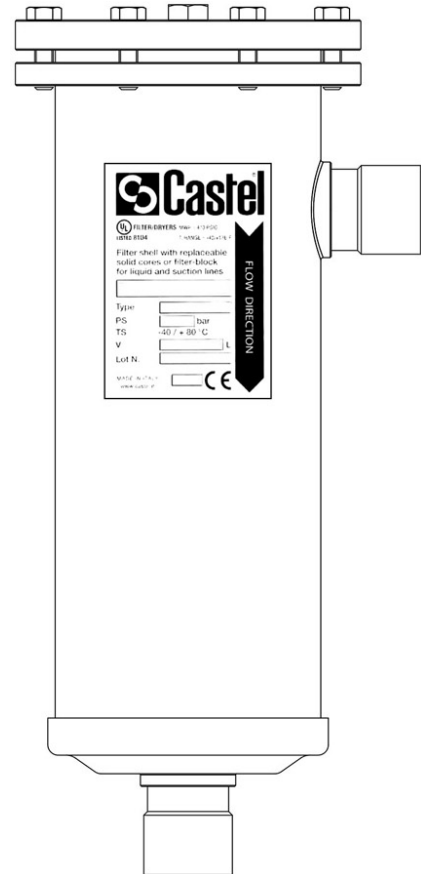

Product use

Dryers for the liquid line that allow the replacement of the dryer elements, so-called cartridges.
Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:
HCFC (R22)
HFC (R134a, R404A, R407C, R410A, R507)
HFO (R1234ze)
HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Product details

N° Catalogue Couvercle fileté 4412/13AF

Raccords ODS Ø [in.] 1.5/8"

Raccords ODS Ø [mm] -

W Ø [mm] 48,3

Type cartouches 4490/A4490/B4490/AA4490/AB4490/BA4490/BB

N° cartouches 2

Cubature nominale [cm³] 1600

PS[bar] 50

MWP [psi] (1) 470

| | |
|-------------|-----|
| TS[°C] min. | -40 |
| TS[°C] max. | +80 |
| Emballage | 1 |

Notes

(1): conformément à homologation UL