

Product Code

**DF230/4S**


Anti-Acid Solid Core Filter Drier

1/2" ODS

PS = 50 bar - 680 PSI

**P**  **LYHEDRA**

**CL**  **ASSIC**

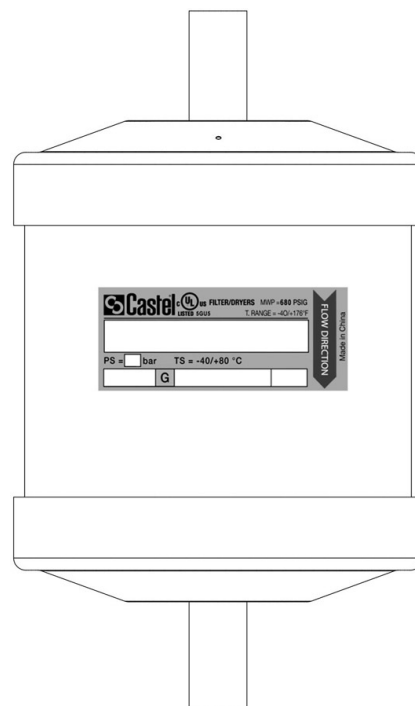

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

## Product details

**Code international** 304S

**Raccords ODS Ø [in.]** 1/2"

**Raccords ODS Ø [mm]** -

**Cubature nominale [cm<sup>3</sup>]** 500

**PS[bar]** 50

**MWP [psi] (1)** 680

**TS[°C] Min** -40

**TS[°C] Max** +80

**Emballage** 10

## Notes

(1): conformément à homologation UL

(2): Pas approuvé UL