


Product Code

3315N/7S

Hot Gas Bypass Capacity Reg. - polyhedra

7/8"-22mm ODS

PS = 45 bar

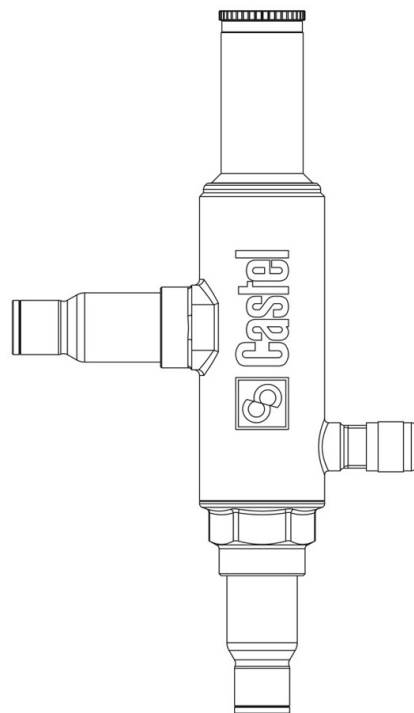

P  **LYHEDRA**

Product use

In refrigeration and air conditioning systems, it is preferable to limit the minimum evaporation pressure during periods of reduced load. Capacity regulators are a solution to these problems as they allow a portion of the hot discharge gas in the high pressure line to bypass directly to the low pressure line, returning the evaporation temperature/pressure to the desired value

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1, A2L, or A3:

HFC (R134A, R32, R404A, R407C, R410A, R507)

HFO (R1234YF, R1234ZE)

HFO + HFC (R448A, R449A, R450A, R452A, R452B, R454A, R454B, R454C, R455A, R513A, R515A, R515B)

HC (R290, R600, R600A, R1270)

Product details

| | |
|---------------------------|-------|
| Raccords SAE Flare | - |
| Raccords Ø ODS [in.] | 7/8" |
| Ø ODS [mm] | 22 |
| Plage de régulation [bar] | 2 - 7 |
| Kv [m ³ /h] | 1,84 |
| PS [bar] | 45 |
| TS [°C] min. | - 40 |

| | |
|---------------------|--------------|
| TS [°C] max. | + 130 |
|---------------------|--------------|

| | |
|------------------|----------|
| Emballage | 8 |
|------------------|----------|