


Product Code

**9150/R69**

Orifice Assemblies  
07x2028

CLASSIC

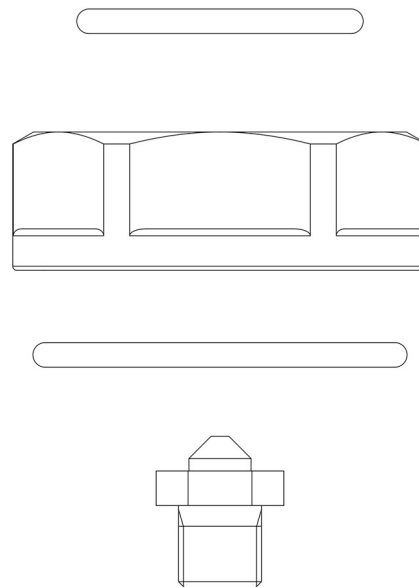

## Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A,  
R515A, R515B)

These valves are only sold in the model without the coil (S suffix), with 9 nozzles assembled for an increasing output from 1 to 22 kW with R410A.

## Product details

Type d'orifice 07

Capacités nominales (1) [kW] R1 11,26

Capacités nominales (1) [kW] R2 14,35

R404A 10,51

R507 10,51

R407C 14,66

R410A 17,22

R1234ze 8,84

R448A 14,03

R449A 13,77

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

R450A	9,88
R452A	10,88
R513A	9,55
R515A	8,51
R515B	8,47
Emballage	180

## Notes

(1) Les capacités nominales se basent sur :

- Température d'évaporation  $T_{\text{evap}} = +5 \text{ °C}$
- Température de condensation  $T_{\text{cond}} = +32 \text{ °C}$
- Température du liquide frigorigène en amont du détendeur  $T_{\text{liq}} = +28 \text{ °C}$