


Product Code

6690B/M18

Ways Valves to be motorized

18mm ODS

PS = 45 bar

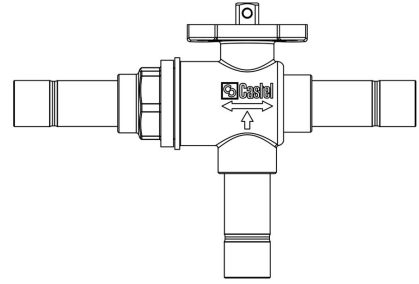

Product use

Accessories for use with the following ASHRAE 34:2019 refrigerants, Class A1:

HCFC (R22)

HFC (R134a, R404A, R407C, R410A, R507)

HFO (R1234ze)

HFO + HFC (R448A, R449A, R450A, R452A, R513A, R515A, R515B)

Product details

Katalog Nr (1) 6690B/M18

Anschlüsse ODS Ø [in.] -

Anschlüsse ODS Ø [mm] 18

Bohrung Ø [mm] 13,5

Kv [m³/h] 4,6

PS[bar] 45

MWP [psi] (2) 650

TS[°C] min. -40

TS[°C] max. +150

Verpackung 1

Notes

NB: Versionen mit Proportionaldurchfluss erhältlich

Castel non si assume alcuna responsabilità per eventuali errori nei cataloghi, opuscoli e altro materiale stampato o indicato nel sito Castel.it. Castel si riserva il diritto di modificare i propri prodotti senza preavviso. Tutti i marchi in questo materiale sono di proprietà di Castel. Tutti i diritti riservati.

Castel assumes no responsibility for any errors in catalogs, brochures and other material printed or indicated on the Castel.it website. Castel reserves the right to modify its products without notice. All trademarks in this material are the property of Castel. All rights reserved.

- (1): mit Adapter für Servomotoren mit ISO-Anbauflansch
- (2): Übereinstimmung zur UL-Zulassung
- (3): Ohne UL-Zertifizierung